


SISTEMI PER LA GESTIONE DEL TRAFFICO - TRAFFIC CONTROL SYSTEM

**MOD.
ROMA**

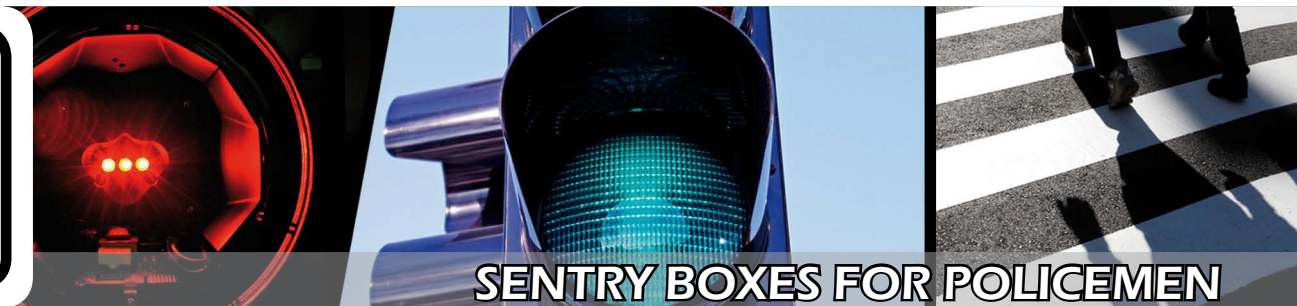

SENTRY BOXES FOR POLICEMEN

GENERAL CHARACTERISTICS

Sentry box especially designed for meeting specific requirements of historical areas and city centers, built with strict safety standards and strong materials.

- Structure realized with steel tubular tyre mm 60x60 3 mm thick
- External wall and internal panels in galvanized sheet steel 3 mm thick
- Thermic insulation of walls and roof with styrofoam material, thickness of 30 mm
- Entry swing door with external opening and cylindrical lock
- Entry stairs with two steps in antislip aluminium sheet mm 3+2
- Sound and shatter-proof window glasses Blindovis 18/19
- One lateral sliding window that can be opened, mounted on bearings
- Movable floor realized with antislip aluminium staves mm 3+2 mounted on stainless steel drop slide
- 4-pitch roof in galvanizes sheets and ceiling 2 mm thick, with one brass ornamental cone
- Writing desk with wood shelf
- Movable seat, coat hook
- Electric panel in compliance to CEI normative, current overload protection switch, socket, light switch and disconnecting switch for air conditioner (where provided), no. 4 halogen spotlight inserted in the ceiling
- Epoxy powder painting, any colour on demand

Dimensioni:

- Base cm 230x250;
- Roof cm 240x240;
- Room cm 200x200x204 H;
- Total height cm 304, ornamental cone included
- Total weight average Kg 1.400;
- Possibility of loading and unload with a lift truck or auto crane after having disassembled the roof
- All the components of the sentry box are interchangeable.


On request, the sentry box can be supplied with internal dimensions cm 150x150x204 H.






SISTEMI PER LA GESTIONE DEL TRAFFICO - TRAFFIC CONTROL SYSTEM

FRONTAL VIEW

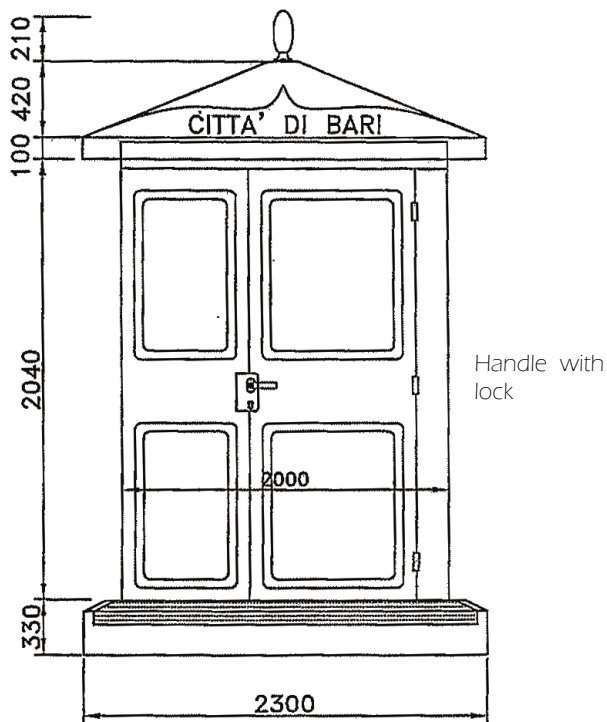

Handle with lock

BACKSIDE VIEW

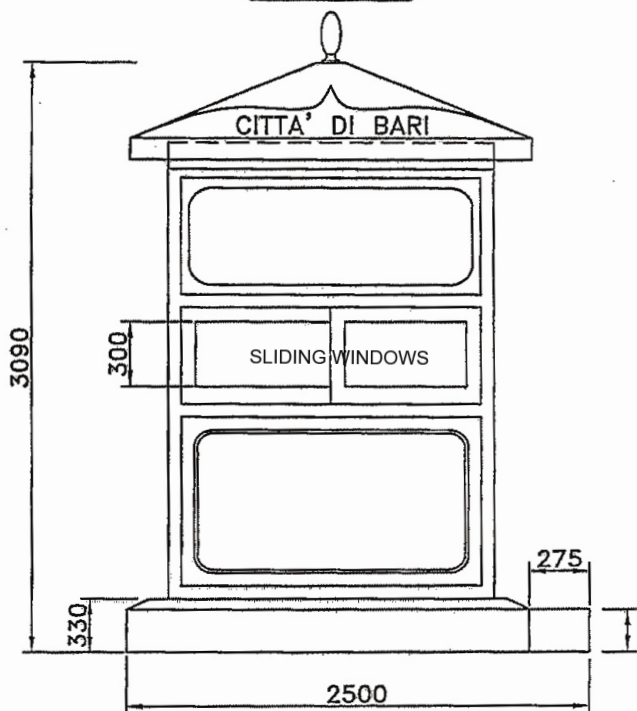

AIR- CONDITIONER/GAR

Heat pump air conditioner without outdoor unit block positioned on the wall.

- Air ventilation
 - Air condenser through two holes communicating with the outside
 - Dehumidification through dry function
 - Ventilation function
 - Temperature sensor on the remote
 - Programmable digital timer
 - washable air filters
 - Ecologic refrigerant R410A (HFC)
 - Power supply 230V. 50Hz
 - Power consumption in a climate KW 0.900
 - Dimensions height mm735, largness 839 mm, depth 260 mm
- (The manufacturer reserves the right to change any characteristic of the product without notice)



Air-conditioner

SISTEMI PER LA GESTIONE DEL TRAFFICO - TRAFFIC CONTROL SYSTEM

STANDARD EQUIPMENT

- Air conditioning heat pump
- First Aid Box
- Fire extinguisher powder from 2 kg
- Stick bright multifunction
- Seat with chrome legs

OPTIONAL ACCESSORIES

- Intercom / Telephone
- Drawer paper shuffler
- Ceiling lamp with fluorescent lamp and a protective grid on all four sides of the roof for the outdoor lighting
- Self-powered emergency lights



Internal lighting ceiling spotlight



Electrical panel, first-aid kit, luminous sticks multifunction, fire extinguisher



Tray pass documents and intercom system

AUTHORIZED DISTRIBUTOR



LA SEMAFORICA SRL
Via Ponticello, 17
35129 Padova
Italy

www.lasemaforica.com

Tel. 049 773055 - Fax 049 8074002 - e-mail: info@lasemaforica.com

Company with ISO 9001:2008 certificate for projects, installation and maintenance of luminous signs for traffic safety.
Clearance SOA cat. OS09 class IV.